



**CHARACTERISTICS AND COMPOSITION**

- DC01 sheet steel housing
- Available in solid or perforated version in the lower right and upper left, to install a grill and/or fan
- Reversible sheet steel door with Ø 3 mm double bar locking system and no. 2 welded and painted profiles
- P.A. plate made from sendzimir sheet steel
- Cable entrance closure flange (with polyurethane gasket) made from sheet steel
- Set of screws for grounding and assembly.

**PAINT FINISH**

ETA standard finishing cycle: paint-based primer with deposition by cataphoresis with epoxy resin and finishing using thermosetting powders. Colour: RAL 7035 textured finish.




**PROTECTION RATING**

- IP66 compliant with IEC EN62208 and EN60529 \*
- NEMA4 compliant with UL508A; UL50
- Protection rating ensured by the two-component polyurethane foam gasket
- Impact resistance rating IK10 compliant with IEC EN62208; EN62262.


\* IP guaranteed for not drilled box.



**BOX WITH FAN AND CANOPY**

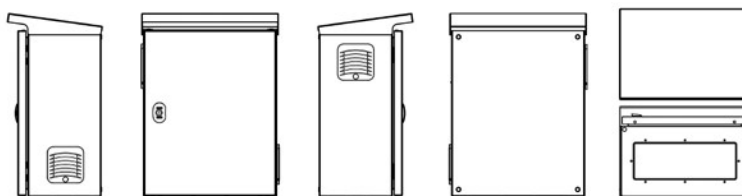

**BOX WITH FAN**

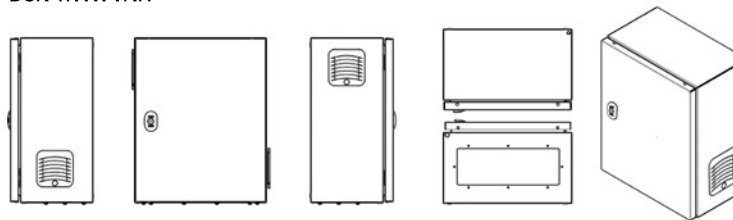

Boxes

**VIDEOSURVEILLANCE BOXES**

DIMENSIONS			PRODUCT CODE	
L	H	P	SOLID VERSION	PERFORATED VERSION FOR VENTILATION
300	400	200	EC030420*	EC030420.VS*
400	500	250	EC040525	EC040525.VS
400	600	250	EC040625	EC040625.VS
600	400	300	EC060430	EC060430.VS
600	600	300	EC060630	EC060630.VS

\* Canopy not applicable

**ACCESSORIES**

DESCRIPTION	CATALOG PAGE
ECC T RAIN CANOPY	182
VIRO ECWE0006 LOCKING SYSTEM	179
WTSG010 and WTSV1000220 FAN AND AIR INLET FILTER	329
WI284 and WI286 THERMOSTATS	339 / 340
WI271 and WI274 ANTI-CONDENSATION HEATER	336
MICRO SWITCH ECMC0001	182
POLE MOUNTING KIT ECFP0001	182
WALL MOUNTING BRACKETS ECF50001	182
DIN RAIL SDWA	191
19" RACK UPRIGHTS ECMR	180
DOOR STOPPER ECWA0001	180
FLANGE INSERTS ECRM	184